


FASTENING SYSTEMS

Coil Nailer



C-90

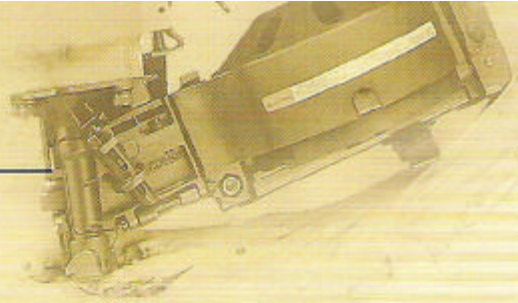

C-70



R-45



C-57, C-55



C-65




C-50




- Application :**
1. Sheathing
 2. Decking
 3. Sub flooring
 4. Create Pallet
 5. Box Assembly
 6. Wood assembly


- Special Features :**
1. 360° adjustable exhaust port
 2. Adjustable depth of drive for Precision nailing
 3. Ergonomical design for continuous operations
 4. Magnesium Alloy Hosing Reduce weight
 5. Lost-Wax casting precision in Size, Special material for durability




• C-90




• C-70




• C-50



• R-45



• C-65



• C-67

MODEL	FASTENER COMPATIBLE MODEL	TOOL SPECIFICATIONS								LOAD CAPACITY	TOOL NO.	FASTENER						
		WEIGHT		LENGTH		HEIGHT		WIDTH				PRESSURE	HEAD DIA.		SHANK DIA. mm(inch)	LENGTH mm(inch)	SHANK TYPE	
		kg	lbs	mm	inch	mm	inch	mm	inch				mm	inch				
R-45	BOSTITCH RN45B PORTER-CABLE RN175	2.45	5.39	300	11.81	255	10.04	115	4.53	4.5-8KG/cm ² 65-115psi	120pcs	CC/SI-06	10	0.39	3.1	0.122	19(3/4) 22(1/8) 25(1) 33(1-1/8) 38(1-1/2) 45(1-3/4)	SMOOTH SCREW RING
C-90	BOSTITCH N86C	4.36	9.61	327	12.87	139	5.47	348	13.7	5-7KG/cm ² 70-110psi	300pcs	CE/SI-01	6.5	0.256	2.67(0.113) 3.05(0.120) 3.33(0.131)	64(2-1/2) - 90(3-1/2)		
C-57	BOSTITCH N57C	2.8	6.16	380	14.96	140	5.51	310	12.2	5-8KG/cm ² 70-110psi	300pcs	CY/SI-01	6.5	0.256	2.3(0.090) 2.5(0.099)	25(1") - 57(2-1/4)		
C-70	BOSTITCH N70CB	3.6	7.92	345	13.58	130	5.11	350	13.77	5-7KG/cm ² 70-110psi	300pcs	CB/SI-01	6.5	0.256	2.3(0.090) 2.5(0.099) 2.67(0.113)	45(1-3/4) - 70(2-3/4)		
C-50	HITACHI NV50A1	1.9	5.29	280	11.02	240	9.44	120	4.72	5-7KG/cm ² 70-110psi	300pcs	CU/SI-01	6.5	0.256	2.1	0.083	27(1-1/16) - 50(2")	
C-65	MAX CN565	2.3	5.07	345	13.58	130	5.11	350	13.77	5-7KG/cm ² 70-110psi	300pcs	CD/SI-01	6.5	0.256	2.1(0.083) 2.3(0.090) 2.5(0.099)	25(1") - 65(2-1/2)		
C-65	BOSTITCH N55C	2.8	6.16	380	14.96	140	5.51	316	12.2	5-7KG/cm ² 70-110psi	300pcs	CX/SI-01	6.5	0.256	2.1(0.083) 2.3(0.090) 2.5(0.099)	25(1") - 55(2-3/16)		