


# FASTENING SYSTEMS

## 15,16,18GA Brad Nailer



F18/32

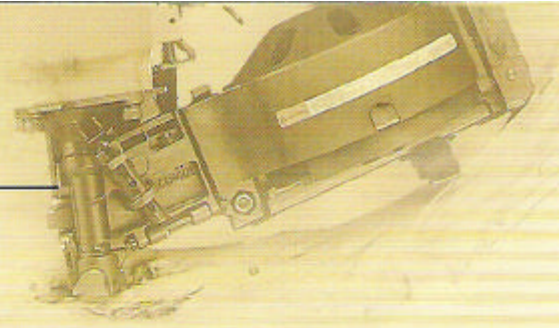


F18/50, F16/50L



F18/30



F18/50  
F16/50  
F16/64

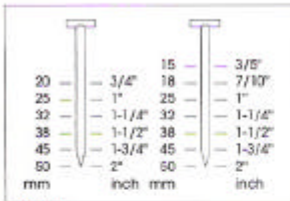


• F18/50

### Application :


1. Linear Strips
2. Paneling & Trim
3. Door & Window casing
4. Cabinet fronts
5. Picture & Mirror frames
6. Decoration

### Special Features :


1. 360° adjustable air deflector
2. Quick release easy jam removal
3. Light weight, injection die casting body
4. Single-sequential fire switch (optional)
5. Depth-of-drive adjustment

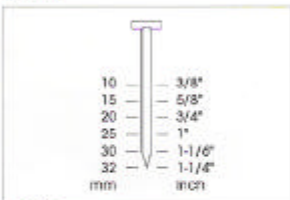

• F18/32

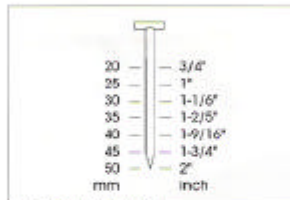

• F18/50, F16/50, F16/50L

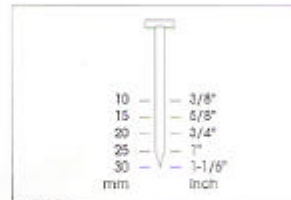

• F18/30



• F16/64

| MODEL   | FASTENER COMPATIBLE MODEL         | TOOL SPECIFICATIONS |      |        |       |        |       |       |      |                                    |               | FASTENER |           |       |       |       |  |       |
|---------|-----------------------------------|---------------------|------|--------|-------|--------|-------|-------|------|------------------------------------|---------------|----------|-----------|-------|-------|-------|--|-------|
|         |                                   | WEIGHT              |      | LENGTH |       | HEIGHT |       | WIDTH |      | PRESSURE                           | LOAD CAPACITY | TOOL NO. | THICKNESS |       | WIDTH |       | LENGTH   | GAUGE |
|         |                                   | kg                  | lbs  | mm     | inch  | mm     | inch  | mm    | inch |                                    |               |          | mm        | inch  | mm    | inch  |  |       |
| F18/32  | BOSTITCH BT35                     | 1.1                 | 2.42 | 250    | 9.84  | 190    | 7.48  | 55    | 2.17 | 4-7KG/cm <sup>2</sup><br>60-100psi | 100pcs        | FA/S2-05 | 1         | 0.04  | 1.25  | 0.06  | 10(3/8") 15(5/8") 20(3/4") 25(1")<br>30(1-1/8") 32(1-1/4")   | 18    |
| F18/50  | SENCO SLP20<br>BOSTITCH BT50      | 1.5                 | 3.3  | 235    | 9.25  | 240    | 9.45  | 55    | 2.17 | 4-7KG/cm <sup>2</sup><br>60-100psi | 100pcs        | FB/S2-07 | 1         | 0.04  | 1.25  | 0.06  | 20(3/4") 25(1") 30(1-1/8")<br>35(1-3/8") 40(1-5/8") 45(1-3/4") 50(2")  | 18    |
| F18/30  | MAX F35MO<br>BEA SK330-121        | 1.1                 | 2.42 | 250    | 9.84  | 180    | 7.09  | 55    | 2.17 | 4-7KG/cm <sup>2</sup><br>60-100psi | 100pcs        | FG/N1-06 | 1         | 0.04  | 1.25  | 0.05  | 10(3/8") 15(5/8")<br>20(3/4") 25(1") 30(1-1/8")  | 18    |
| F18/50  | ATRO MINOR609                     | 2.18                | 2.18 | 310    | 12.2  | 270    | 10.6  | 77    | 3.03 | 4-7KG/cm <sup>2</sup><br>60-110psi | 100pcs        | FH/S1-03 | 1.8       | 0.07  | 1.8   | 0.07  | 10(3/8") 15(5/8") 20(3/4")<br>25(1") 30(1-1/8")  | 15    |
| F16/50L | MAX NF352-57/16-50<br>BEA SK600   | 1.5                 | 3.3  | 280    | 11.02 | 245    | 9.65  | 59    | 2.32 | 4-7KG/cm <sup>2</sup><br>60-110psi | 100pcs        | FC/S2-02 | 1.4       | 0.055 | 1.6   | 0.06  | 20(3/4") 25(1") 32(1-1/4") 38(1-1/2")<br>45(1-3/4") 50(2")   | 16    |
| F16/50  | SEARS 18315<br>DUO-FAST LPN-746   | 2.18                | 4.8  | 310    | 12.2  | 270    | 10.6  | 77    | 3.03 | 4-7KG/cm <sup>2</sup><br>60-110psi | 100pcs        | FC/S1-07 | 1.4       | 0.055 | 1.6   | 0.063 | 20(3/4") 25(1") 32(1-1/4") 38(1-1/2")<br>45(1-3/4") 50(2")   | 16    |
| F16/64  | PORTER-CABLE FN250<br>SEALS 18321 | 2.1                 | 4.6  | 320    | 12.6  | 270    | 10.63 | 80    | 3.15 | 4-7KG/cm <sup>2</sup><br>60-110psi | 100pcs        | FE/S1-02 | 1.4       | 0.055 | 1.6   | 0.063 | 20(3/4") 25(1") 32(1-1/4") 38(1-1/2")<br>45(1-3/4") 50(2") 57(2-1/4") 64(2-1/2")                                 | 16    |
| F18/57  | SENCO<br>Finis Pro 25             | 1.3                 | 2.86 | 250    | 9.84  | 260    | 10.24 | 59    | 2.32 | 4-7KG/cm <sup>2</sup><br>60-100psi | 100pcs        | FO/S1-01 | 1         | 0.039 | 1.25  | 0.049 | 10(3/8") 15(5/8") 20(3/4")<br>25(1") 30(1-1/8") 35(1-1/4") 38(1-1/2")<br>40(1-5/8") 45(1-3/4") 50(2") 57(2-1/4") | 18    |
| F18/35  | PORTER-CABLE<br>BN125A            | 1.2                 | 2.64 | 260    | 10.24 | 210    | 8.27  | 59    | 2.32 | 4-7KG/cm <sup>2</sup><br>60-100psi | 100pcs        | FP/S1-01 | 1         | 0.039 | 1.25  | 0.049 | 10(3/8") 15(5/8") 20(3/4")<br>25(1") 30(1-1/8") 35(1-1/4")   | 18    |