

## FASTENING SYSTEMS

- Angle Finish Nailer
- Heavy-Duty T-nailer (Concrete Nailer)
- Corrugated Fasteners

### Special Features :

1. 360° adjustable air deflector
2. Quick release cover for easy jam removal
3. Depth-of-drive adjustment
4. No mark rubber tip device
5. Magnesium Alloy Housing

### Application :

1. Paneling
2. Trim, Door & Window
3. Casings
4. Upholstery Trim
5. Boards in furniture
6. Cabinet face frames
7. Decoration
8. Wood furniture



DA-65



DA-50



T-64F

### Application :


1. Picture
2. Mirror
3. Cabinet frames
4. Truss assemble
5. Doors
6. Windows
7. Prefabricated wooden boxes
8. Hangers




CF-15P/CF-15S  
NCF-15P/NCF-15B

### Application :


1. Trackless carpet strip
2. Wood furring
3. Floor underlay
4. Carpet edge molding
5. Installation of metal drywall track
6. Door & Window

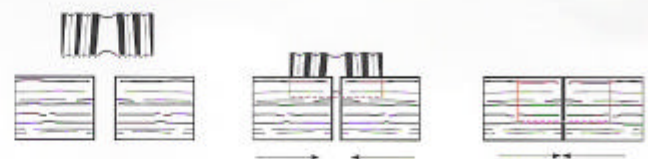


• CF-15




• CF-15P/CF-15S



• T-64F



• DA-65



• DA-50

MODEL	FASTENER COMPATIBLE MODEL	TOOL SPECIFICATIONS							TOOL NO.	FASTENER													
		WEIGHT		LENGTH		HEIGHT		WIDTH		THICKNESS	WIDTH	CROWN		SHANK THICKNESS	LENGTH	GAUGE	ANGLE						
		kg	lbs	mm	inch	mm	inch	mm				inch	mm					inch	mm	inch	mm(inch)	S.W.G.	
DA-65	SENCO SFN40	2.0	4.4	300	11.81	310	12.20	80	3.15	4.5-8KG/cm <sup>2</sup> 65-115psi	100pcs	F1/S1-01	1.8	0.67	1.8	0.7				32-65 (1-1/4", 2-1/2")	15	34	
DA-50	SENCO SFN1	2.0	4.4	320	12.6	290	11.4	10.8	4.25	4.5-8KG/cm <sup>2</sup> 60-90psi	100pcs	FJ/S1-02	1.8	0.67	1.8	0.7				25-50 (1"-2")	18	34	
T-64F	SENCO MA-080T BOBITCH M1812-CNCT	2.65	5.83	305	12.01	290	11.42	87	3.43	4.5-8KG/cm <sup>2</sup> 65-115psi	80pcs	FD/S2-11	2.2	0.087	2.2	0.87				18-64 (3/4"-2", 2-1/2")	14		
CF-15P	PASLODE MA-C30	2.6	5.72	300	11.81	270	10.63	87	3.43	4.5-8KG/cm <sup>2</sup> 65-115psi	80pcs	WA/S2-02					25.4	1	2.2	0.09	9(3/8") 12(1/2") 15(5/8")		
CF-15S	SENCO SC2	2.6	5.72	300	11.81	270	10.63	87	3.43	4.5-8KG/cm <sup>2</sup> 65-115psi	80pcs	WA/S2-01					25.4	1	2.2	0.09	9(3/8") 12(1/2") 15(5/8")		
NCF-15P	PASLODE MA-C20N	2.6	5.72	300	11.81	270	10.63	87	3.43	4.5-8KG/cm <sup>2</sup> 65-115psi	80pcs	WC/S2-01					17.5	0.69	2.2	0.09	5(1/4") 9(3/8") 12(1/2") 15(5/8")		
NCF-15B	BEA WM12-156	2.3	5.06	305	12	270	10.63	92	3.62	4.5-7.5KG/cm <sup>2</sup> 65-110psi	80pcs	WC/S2-05					18.5	0.728	2.2	0.09	5(1/4") 9(3/8") 12(1/2") 15(5/8")		