


FASTENING SYSTEMS

- 18GA 2-in-1 Air Nailer
- Electric Nailer

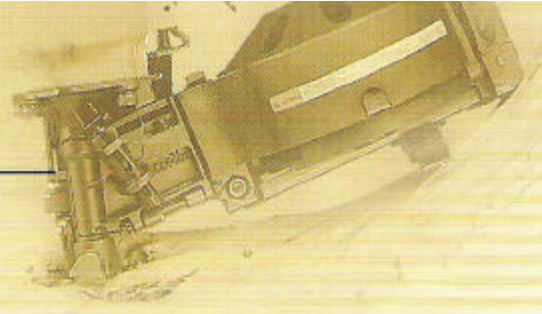

Special Features :

1. Housing : Nylon/Glass Fiber w/soft grip
2. Trigger Switch : Two-finger w/soft padding
3. Power Cord : 1.8M-2C/3C
4. Safety Approval : CE/UL
5. Rated Voltage 120V-230V
6. Max. Firing Speed : 30 Shots/min



EF18/32
EF18/32C
E92/25
ESM/25
E425J
E1025J



F18/50C




F18/32C

Application :


1. Molding & Decorative Trim
2. Up holstered & Trim Panels
3. Picture Frame Assembly
4. Cabinet Work
5. Door & Window Casting
6. Rattan
7. Interior & External
8. Furniture Trim

Special Features :


1. 360° adjustable exhaust port
2. Adjustable cover plate, control depth of nails/staplers on the workpiece
3. Protect work surface and indicate nail and staple
4. Comfortable handle with rubber
5. Strong & light weight die-cast body
6. Fast, Easy Side loading and view nail status
7. Quick-release nosepiece for fast clearing of jams

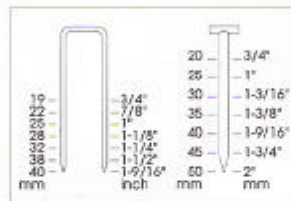

• F18/50C

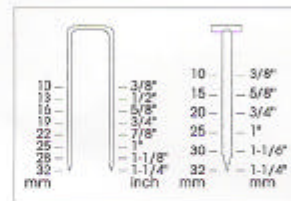

• F18/32C

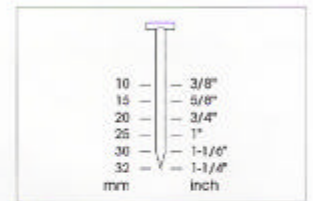

• EFA18/32

MODEL	FASTENER COMPATIBLE MODEL	TOOL SPECIFICATIONS								FASTENER														
		WEIGHT		LENGTH		HEIGHT		WIDTH		PRESSURE	LOAD CAPACITY	TOOL NO.	SHANK WIDTH		CROWN		SHANK THICKNESS		THICKNESS		WIDTH		LENGTH	GAUGE
		kg	lbs	mm	inch	mm	inch	mm	inch				mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		
F18/32C	PREBENA combi 30	1.2	2.64	250	9.84	200	7.87	59	2.32	4-7KG/cm ² 60-100psi	100pcs	FL/S1-01	1.25	0.05	5.8	1/4	1.0	0.04	1	1.25			10-32 (3/8", 1-1/4")	18
F18/50C		1.5	3.3	250	9.84	200	7.87	59	2.32	4-7KG/cm ² 60-100psi	100pcs	FK/S1-01	1.25	0.04	5.8	1/4	1.0	0.04	1	1.25			19-40 (20-60")	18
EF18/32	NOVUS J-171	1.65	3.63	260	10.24	225	8.86	55	2.17		100pcs	EFA/S2-01							1	0.04	1.25	0.05	10-32 (3/8"-1-1/4")	18
EF18/32C	NOVUS J-172	1.65	3.63	260	10.24	225	8.86	55	2.17		100pcs	EFL/S2-01	1.25	0.05	5.8	0.228	1.0	0.04	1	0.04	1.25	0.05	10-25 10-32	18
E92/25		1.65	3.63	260	10.24	225	8.86	55	2.17		100pcs	EMG/S2-01	1.25	0.05	6.7	0.343	1.0	0.04					10-25 3/8"-1"	18
ESM-25		1.65	3.63	260	10.24	225	8.86	55	2.17		100pcs	EMH/S2-01	1.2	0.05	10.1	0.398	1.0	0.04					10-25 3/8"-1"	18
E425J		1.65	3.63	260	10.24	225	8.86	55	2.17		100pcs	EUJ/NI-01	1.2	0.05	5.2	0.204	0.6	0.023					10-25 3/8"-1"	20
E1025J		1.65	3.63	260	10.24	225	8.86	55	2.17		100pcs	EUN/NI-02	1.2	0.05	11.2	0.44	0.6	0.023					10-25 3/8"-1"	20