



FASTENING SYSTEMS

17°, 21°, 28°, 34° Framing Nailers

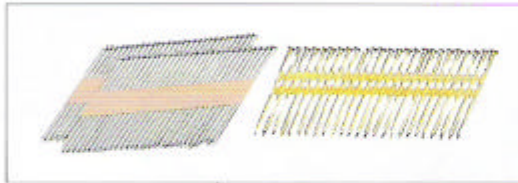

S-90B, S-90D, S-90E, S-90F



S-100A




S-130

Application :


1. Framing & Siding
2. Strapping
3. Root decking
4. Sub flooring
5. Sheathing & Exterior
6. Trusses & Bridging

Special Features :


1. Magnesium Alloy Housing Reduce weight
2. Narrow nose for accurate fastener placement
3. Contact Trip safety
4. Fast Top loading
5. 360° adjustable exhaust Port

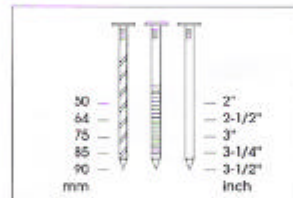

• S-90B, S-90D, S-90E, S-90F

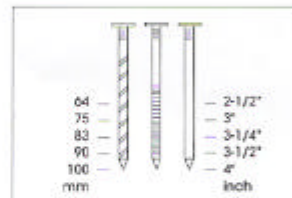

• S-100A

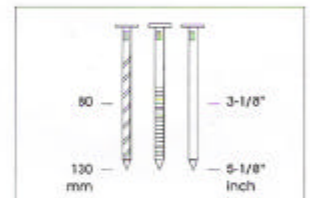

• S-130

MODEL	FASTENER COMPATIBLE MODEL	TOOL SPECIFICATIONS								FASTENER									
		WEIGHT		LENGTH		HEIGHT		WIDTH		TOOL NO.	HEAD	SHANK DIA.	LENGTH	ANGL.	SHANK TYPE	COLLATED			
		kg	lbs	mm	inch	mm	inch	mm	inch								inch(mm)		
S-90B	BOSTITCH N80S SEARS 16320	3.7	8.14	478	18.82	350	13.78	127	5	5-7KG/cm ² 70-100psi	75-106pcs	S8/S1-04	CLIPPED HEAD	0.113(2.87mm) 0.120(3.05mm) 0.131(3.33mm)	2" 2-1/2"(44) 3"(75) 3-1/4"(83) 3-1/2"(90)	SMOOTH SCREW RING	PAPER OF WIRE		
S-90D	SENCO SN60 HITACHI NR63A	3.7	8.14	545	21.46	350	13.78	127	5	5-7KG/cm ² 70-100psi	55-70pcs	S0/S1-04	ROUND HEAD					28°	PLASTIC
S-90E	SENCO SN4 PASLOE 5300	3.7	8.14	468	18.43	350	13.78	127	5	5-7KG/cm ² 70-100psi	55-70pcs	SE/S1-04	CLIPPED HEAD					21°	PAPER
S-90F	ATRO HERON 90	3.7	8.14	545	21.46	350	13.78	127	5	5-7KG/cm ² 70-100psi	55-70pcs	SF/S1-04	ROUND HEAD					34°	PLASTIC
S-100A	BEA P100-950 DUO-FAST CN350	5.0	11	580	22.83	385	15.16	150	5.91	5-7KG/cm ² 70-110psi	55-70pcs	SA/S1-04	ROUND HEAD					17°	PLASTIC
S-130	SENCO HB130 BEA P130-955	5.26	11.60	620	24.2	602	19.76	160	6.29	5-8KG/cm ² 70-110psi	55-70pcs	SG/S1-01	ROUND HEAD	64-100 (2-1/2"-4") 80-130 (3-1/8"-5-1/8")	21°	PLASTIC			