



FASTENING SYSTEMS

Heavy-Duty Staplers

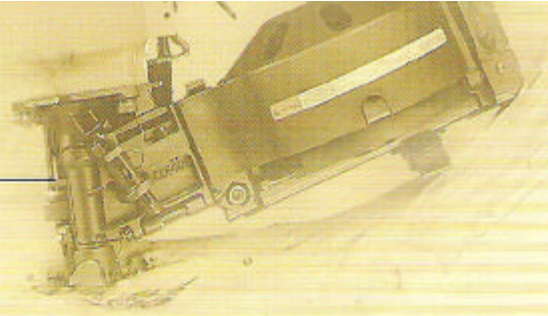

92/40, 90/40

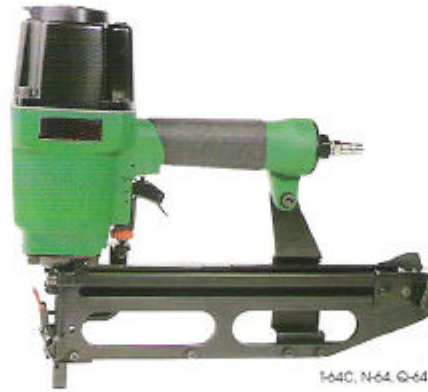

T-64C, N-64, Q-64



90/40L, 92/40L, SM-40L



N-50, P4/50




P-40

Application :


1. Roof deck
2. Wall sheathing
3. Wood shingles
4. Paneling
5. Carpet installation
6. Door and Window castings
7. Trim and Moldings
8. Cabinet work

Special Features :

1. 360° adjustable exhaust port
2. Light weight aluminum die-casting body
3. Ergonomical design for continuous operation with rubber grip
4. Fast easy top loading
5. Depth of drive adjustment to countersink or flush drive nails

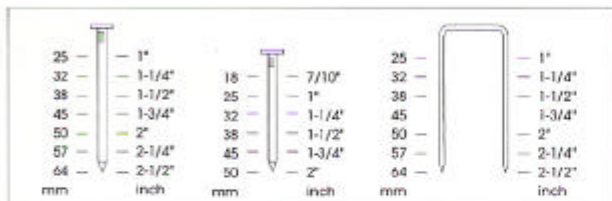

• T-64C

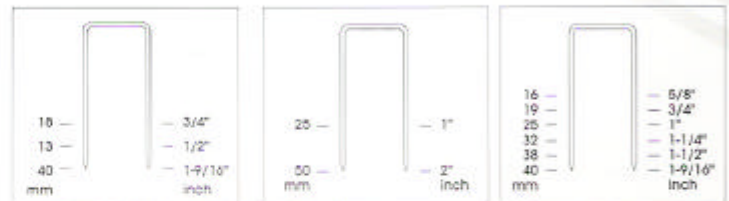

• 92/40, 92/40L, 90/40, 90/40L, SM-40L

• N-50, P4/50

• P-40

MODEL	FASTENER COMPATIBLE MODEL	TOOL SPECIFICATIONS								TOOL NO.	FASTENER									
		WEIGHT		LENGTH		HEIGHT		WIDTH			PRESSURE	LOAD CAPACITY	SHANK WIDTH		CROWN		SHANK THICKNESS		LENGTH	GAUGE
		kg	lbs	mm	inch	mm	inch	mm	inch				mm	inch	mm	inch	mm	inch		
92/40	BEA 92/38-151	2.07	4.55	360	14.2	270	10.6	77	3.03	4-7KG/cm ² 60-100psi	170pcs	UQ/S1-04	1.25	0.049	8.7	0.343	1	0.039	19-40 3/4"-1-9/16"	18
90/40	PORTER-CABIE N5150 SEALS 18367	2.1	4.55	360	14.2	270	10.6	77	3.03	4-7KG/cm ² 60-100psi	170pcs	UD/S1-05	1.25	0.05	5.8	0.23	1	0.04	19-40 3/4"-1-9/16"	18
N-50	SENCO N MODEL	2.65	5.83	380	15	295	11.61	87	3.43	4.5-8KG/cm ² 65-115psi	150pcs	UL/S1-02	1.6	0.06	11.1	0.44	1.4	0.06	25-50 1-0"-2-0"	16
P-40	SENCO SPS	2.3	5.06	310	12.2	270	10.6	80	3.5	4.5-8KG/cm ² 65-115psi	140pcs	MS/S1-02	1.6	0.06	26.5	1.04	1.4	0.06	16-40 (5/8"-1-9/16")	16
90/40L	SENCO L MODEL BEA 90/38-150	1.3	2.86	265	10.43	245	9.65	59	2.32	4-7KG/cm ² 60-100psi	75pcs	UD/S2-02	1.25	0.05	5.8	0.23	1	0.04	13-40 1/2"-1-9/16"	18
P4/50	Postlude 4200-S14/15	1.98	4.35	380	15	295	11.61	87	3.43	4.5-8KG/cm ² 65-115psi	160pcs	ME/S1-01	1.8	0.07	13.4	0.53	2.2	0.086	25-50 (1"-2")	14
T-64C	Prebena Sg ZT-67	2.42	5.33	380	15	295	11.61	87	3.43	4.5-8KG/cm ² 65-115psi	120pcs 140pcs	FR/S1-01	1.6	0.06	11.1	0.44	1.4	0.06	25-65 (1-0"-2-1/2")	16
N64	SENCO SNS50	2.4	5.28	380	15	320	12.63	92	3.62	4.5-7.5KG/cm ² 65-110psi	150pcs	ML/S1-01	1.6	0.06	11.1	0.44	1.4	0.055	32-64 (1-1/4"-2-1/2")	16
Q64	SENCO SQS55	2.4	5.28	380	15	320	12.63	92	3.62	4.5-7.5KG/cm ² 65-110psi	140pcs	MJ/S1-01	1.9	0.075	11.6	0.457	1.7	0.067	32-64 (1-1/4"-2-1/2")	15
92/40L	BEA 92/32-612	1.4	3.08	245	9.64	240	9.45	59	2.32	4-7KG/cm ² 60-100psi	160pcs	UQ/S1-07	1.25	0.049	8.7	0.343	1	0.039	19-40 (3/4"-1-9/16")	18
SM-40L	SENCO SKSM	1.4	3.08	245	9.64	240	9.45	59	2.32	4-7KG/cm ² 60-100psi	160pcs	MK/S1-02	1.2	0.047	10.1	0.398	1	0.039	19-40 (3/4"-1-9/16")	18